




DIMENSION ARE IN INCHES

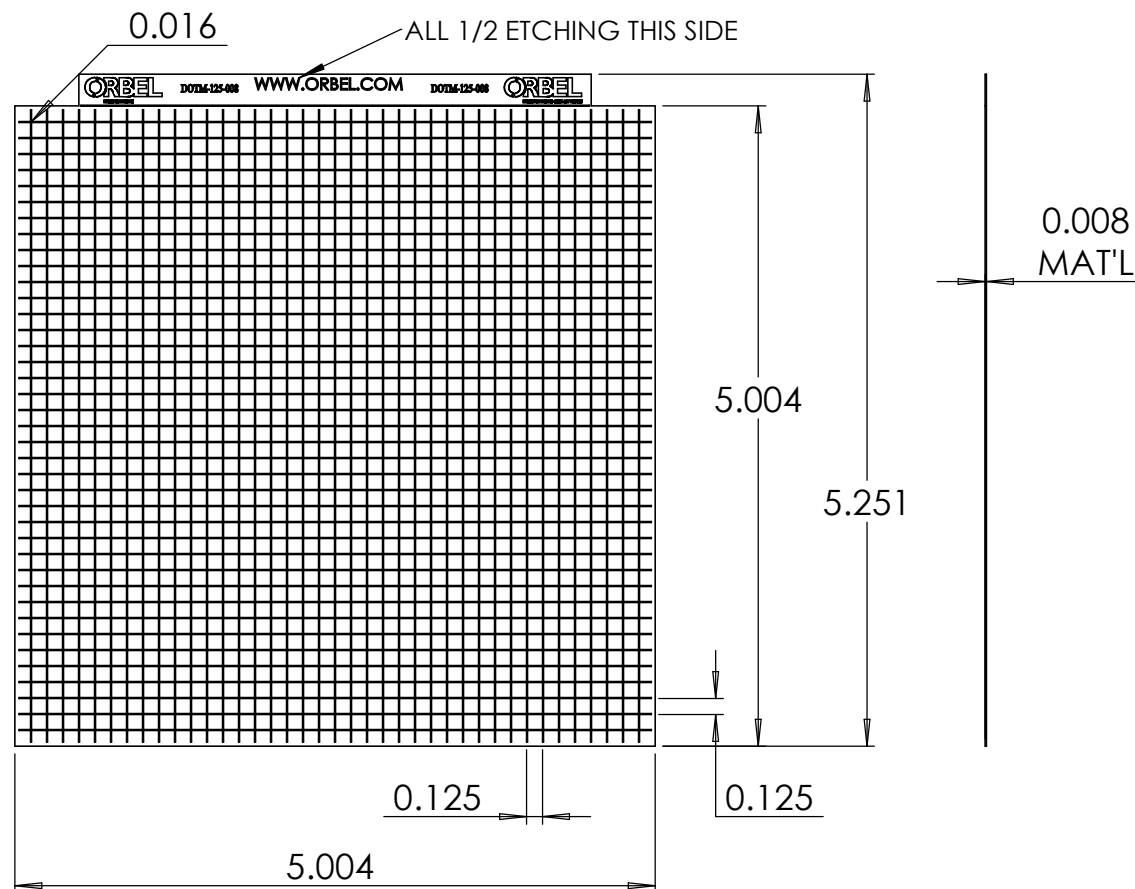

Orbel Confidential

RoHS Compliant

REF DWG. --

| | | | | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------|---------------------------------------------------------------------------------------|--------------------------------|
| THIRD ANGLE PROJECTION  | | | DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 3 Degrees TWO PLACE DECIMAL ± .005 THREE PLACE DECIMAL ± .003 | NAME | DATE |  | |
| | | | | DRAWN | RAM | | 1/26/2018 |
| PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ORBEL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ORBEL CORPORATION IS PROHIBITED. | | | | CHECKED | | | |
| | | | | ENG APPR. | | | |
| | | | | MFG APPR. | | | |
| | | | | Q.A. | | | |
| | | | | COMMENTS: | | | |
| | NEXT ASSY | USED ON | FINISH: | ORBEL | | SIZE A DWG NO. DotM-125-008 SCALE: 2:3 | REV. 01 SHEET 1 OF 1 |
| | APPLICATION | | | | | WEIGHT: | |

MATERIAL:
.008" NICKEL SILVER, 1/2 HARD

ORBEL

SCALE: 2:3 WEIGHT: SHEET 1 OF 1



EZ-Matrixx Board Level Shielding



EZ-MATRIXx FEATURES:

- Alloy 770 Nickel Silver
- Imperial Sizes:
5.004" x 5.004"
With 0.125" spacing
- Metric Sizes:
124mm X 124mm
With 2mm spacing
- EZ-Bend Form Lines
- Precision Ventilation Holes
- Quick Prototyping Solution.
- RoHS Compliant
- Available through Distribution

Orbel, the recognized leader in standard and custom Board Level Shielding, is offering the EZ-Matrixx EMI Shield.

The EZ-Matrixx is the best way to prototype your next PCB Shield. It can be readily and easily formed into a square or rectangular RF board shield to match almost any profile. The EZ-Matrixx has the flexibility of a foil, and the sturdiness of a shield.

Using a highly solderable Nickel Silver Alloy to produce the EZ-Matrixx. This choice in material makes the EZ-Matrixx ideal for anyone looking to quickly apply and test an RF board shield for an application.

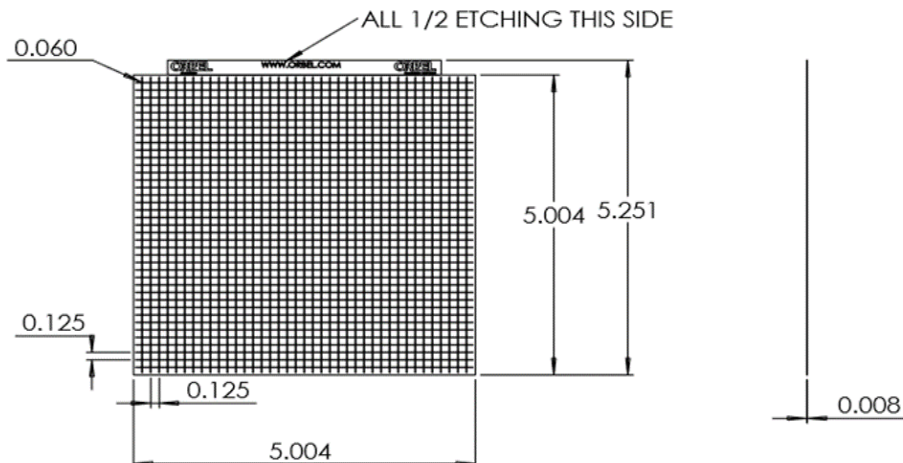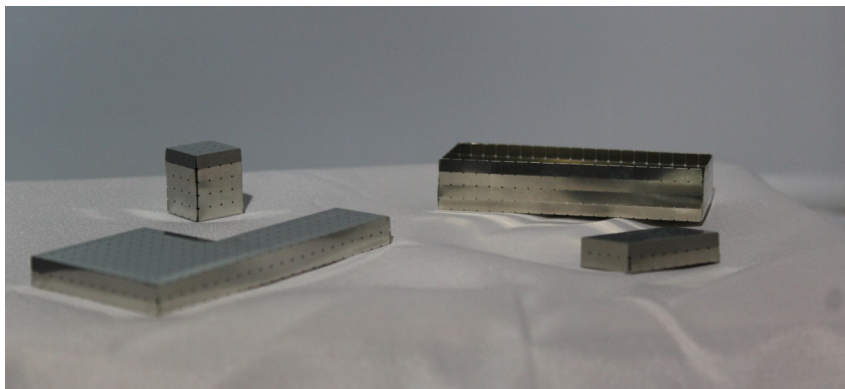

Orbel Corporation

2 Danforth Drive, Easton
PA

610-829-5000

AS9100 Rev.D/ISO
9001:2008

sales@orbel.com

Orbel.com